




# Lenovo Yoga 710-14IKB RAM Replacement

Show the user how to replace or upgrade the ram.

Written By: Grant Doerksen

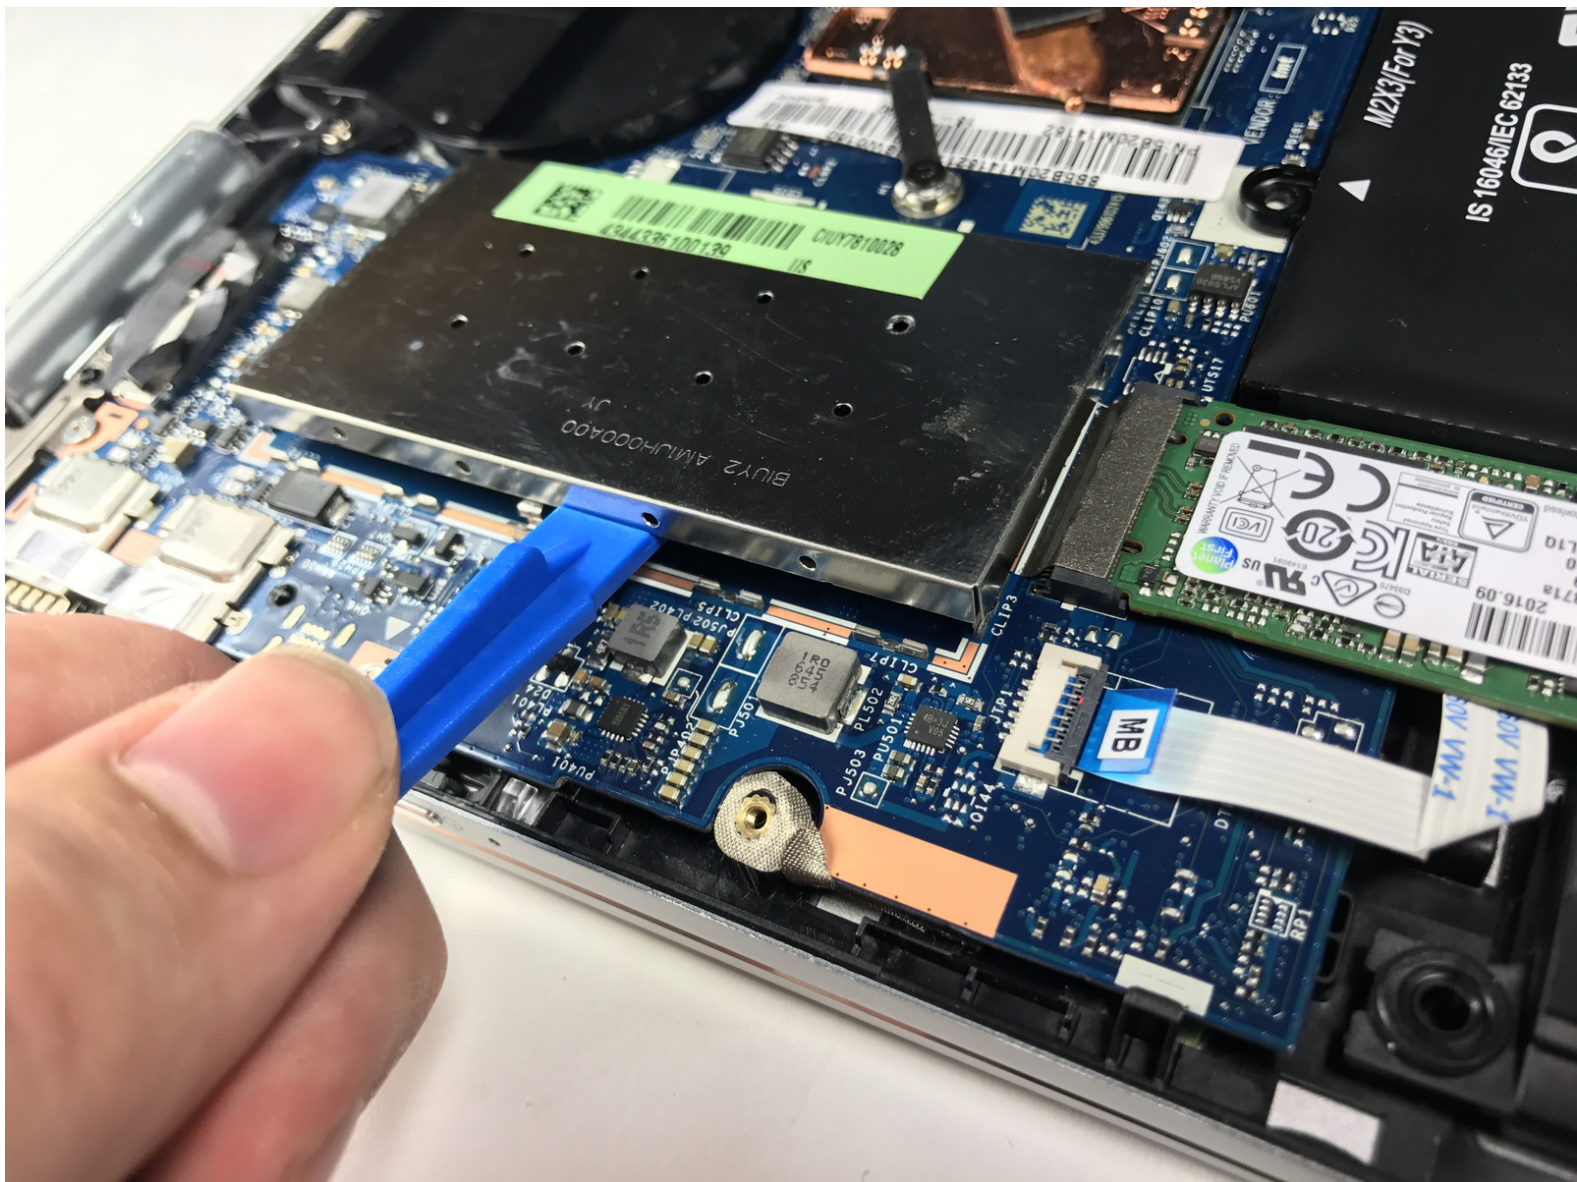




## TOOLS:


- [T4 Torx Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
-

## Step 1 — Back Cover

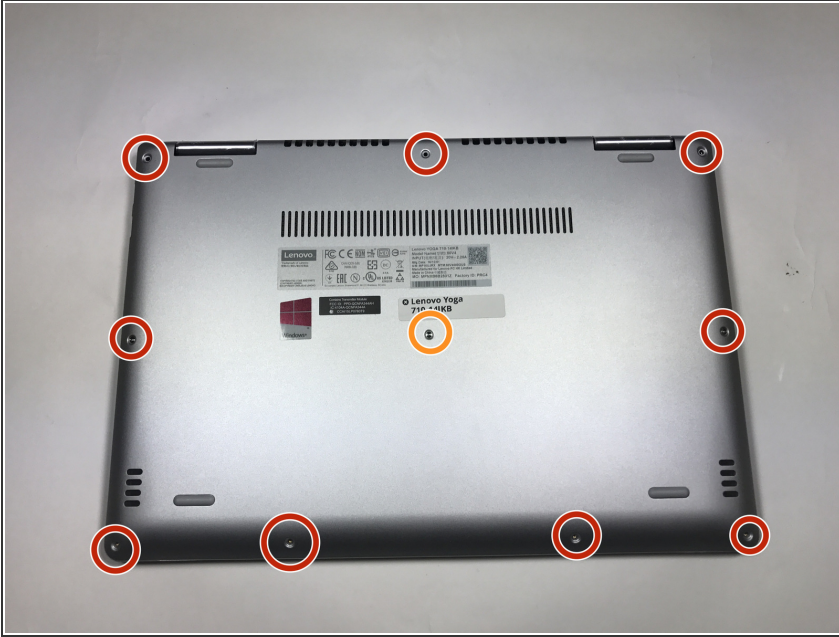

- Use a Torx T4 screwdriver to unscrew the 9 5mm screws holding the cover in place.
  - Use a Torx T4 screwdriver to unscrew the 8mm screw in the center.
- ✦ When, reassembling, make sure not to tighten the screws too much or you may risk cracking the plastic cover.

## Step 2

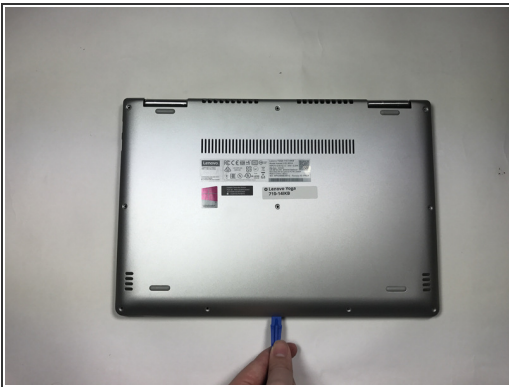


- Use the plastic opening tool to pry the cover up and away from the laptop, starting at one end and working your way around the cover.

⚠ The cover is large and flat and made of thin plastic. It cracks easily, so make sure not to pry too hard.




## Step 3 — RAM

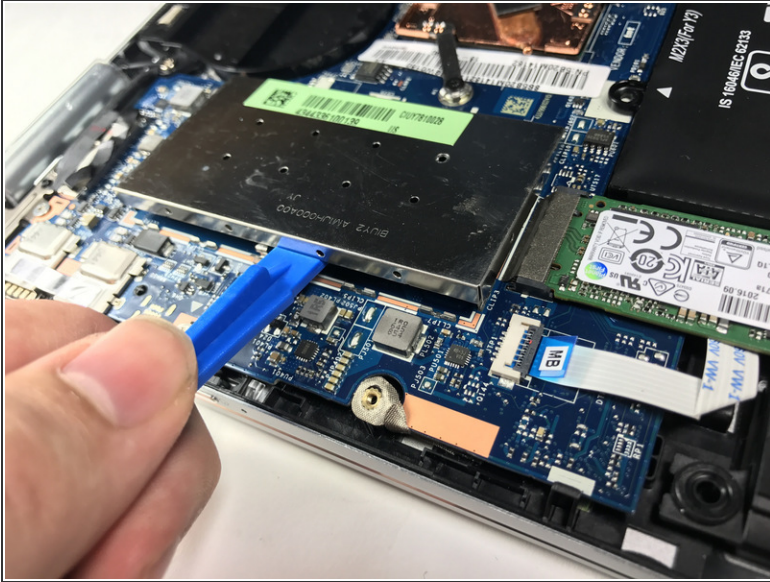


- Use blue plastic opening tool to pry the ram cover loose. Carefully lift up the ram cover and remove it from the laptop.

## Step 4

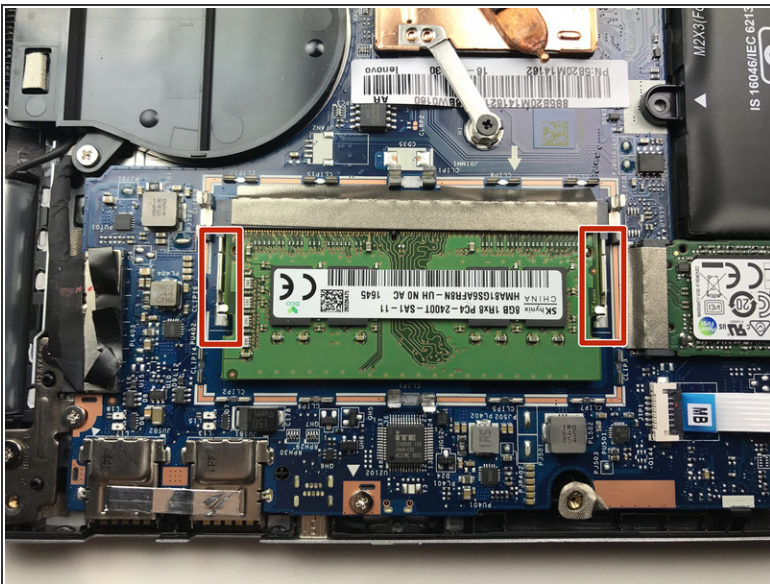

- Locate the ram hold downs.
- Push outwards on the hold downs to release the RAM.

## Step 5

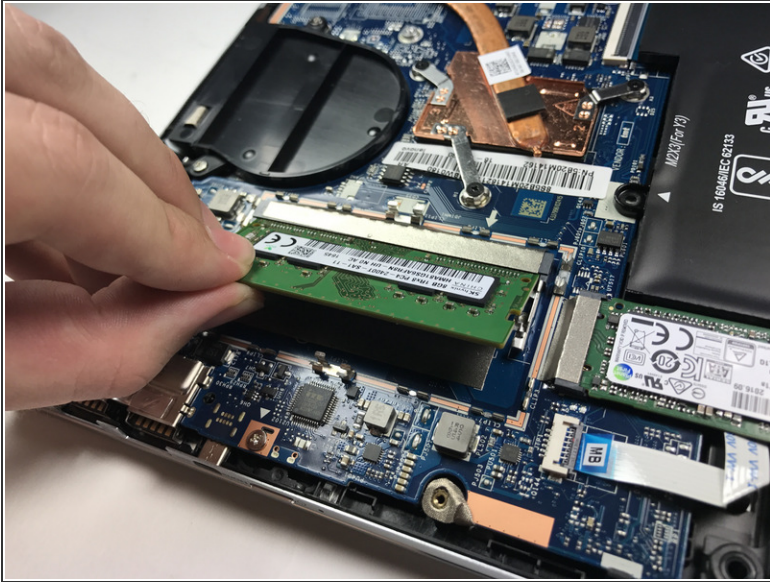

- Remove the RAM by pulling away from the RAM socket.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-21 07:16:14 AM.